



USER MANUAL

SG34-UWQ180C

Shark Gaming Monitor 34" UWQHD 180Hz Curved

GENERAL INFORMATION

Dear Customer,

Thank you for having purchased this product. This document describes how to install and use the LCD colour monitor. Read this manual which contains information for correct, safe use carefully. Keep this manual at hand so that you can refer to it when needed.

PRODUCT DESCRIPTION AND TYPE OF USE

The LCD color monitor presents a very rugged structure. It is designed for continuous operation and can be used in closed circuit TV systems without risks of excessive fatigue. The Flat Panel Display has an active matrix, thin-film transistor (TFT), liquid crystal display (LCD).

GENERAL FEATURES

- Display area
- Wall mounting VESA standard 100*100mm (Not included bracket)
- One composite upgrade, two DP, two HDMI
- Wide inclination to allow viewing either from a seated position or standing up and when moving from one position to the other
- Multilingual OSD menu for easy setting and optimization of the display

OPENING THE BOX

Check that the packing and the contents are not visibly damaged. Contact the retailer immediately if parts are either missing or damaged. Do not attempt to use the device in this case. Send the product back in its original packing if it is damaged.

CONTENTS OF THE BOX

- LCD monitor
- Power Adaptor
- Power cable
- DP cable
- User's manual
- VESA Adapter

Important Note: Accessories may be changed without prior notice.

WARNINGS

POWER

- Only use the power unit provided to power the device. Check mains rating before plugging the power unit in.
- Do not pull the cable to unplug the device.

SAFETY PRECAUTIONS

- Keep the device away from rain and humidity to prevent risk of fire and electrocution. Do not introduce material (solid or liquid) inside. If this should accidentally occur, disconnect the device from the mains and have it inspected by qualified personnel.
- Never open the device. In all cases, contact the qualified personnel or authorized service center for repairs.
- Keep the device away from children, to prevent accidental damage.
- Do not touch the device with wet hands to prevent electrical shock or mechanical damage.
- Do not use the device if it should fall or the external casing is damaged. Risk of electrocution if the device is used in such conditions. Contact the retailer or authorized installer.
- It is advisable to disconnect the power wire if the monitor is not used for a certain time.

INSTALLATION PRECAUTIONS

- To prevent overheating the device, arrange it in a position allowing the flow of air through the slots in the casing. Ensure at least 5 cm of free space when installing inside a rack. For the same reason, do not install sources of heat, such as radiators or hot air ducts. Keep away from direct sunlight. Do not install in areas subject to excessive dust, mechanical vibrations or shocks.
- Do not arrange this device on an unstable surface, such as a tottering or slanted table. The device could fall causing injury or mechanical failures.
- Do not install the device in a place where it could be exposed to humidity or water. Do not direct a jet of water onto the device: risk of fire, electrocution or mechanical failure.
- Stop using the device if water or other material should penetrate inside: risk of fire and electrocution. Contact the retailer or authorized installer.
- Slots and openings in the cabinet are provided for ventilation. These openings must not be blocked or covered.
- Do not place heavy or heat generating objects on top of the device: this could damage the casing and/or increase internal temperature causing faults.
- Do not cover the device with a cloth while it is running to prevent deforming the external casing and overheating the internal parts: risk of fire, electrocution and mechanical failure.
- Keep magnets and magnetized objects away from the device to prevent faults.
- Do not use the device in presence of smoke, vapor, humidity, dust or intense vibrations.
- Wait for a while before operating a device immediately after transporting it from a cold place to a warm place and vice versa. Wait on average for three hours: this will allow the device to adapt to the new ambient (temperature, humidity, etc.).
- The monitor is provided with a plastic base and rubber feet. It can be positioned on a horizontal surface, such as a desk or a table. Make sure that the device is fastened firmly and that it is not resting on unstable supports or surfaces. Dropping could cause severe injury and damage the device.
- Remember to adjust the brightness and contrast to obtain a perfect image.
- The monitor can also be installed on the wall by means of a bracket (not provided).

1.3.4 CLEANING THE DEVICE



- Rub delicately with a dry cloth to remove dust and dirt.
- Dip the cloth in neutral detergent if dirt cannot be eliminated with a dry cloth alone.
- Do not use volatile liquids (such a petrol, alcohol, solvents, etc.) or chemically treated clothes to clean the device to prevent deformation, deterioration or scratches to the paint finish.

1.3.5 PRIVACY AND COPYRIGHT

- The LED monitor is a device for Gaming. Recording of images is subject to the laws in force in your country. Recording of images protected by copyright is forbidden.

Product users shall be responsible for checking and respecting all local rules and regulations concerning monitoring and recording video signals. The manufacturing SHALL NOT BE LIABLE for use of this product not in compliance with the laws in force.

Monitor Inputs

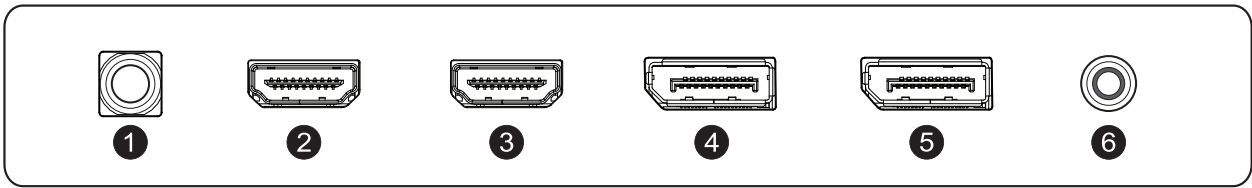

- 1 Power (DC 12V,5A)
- 2 HDMI2
- 3 HDMI1
- 4 DP2
- 5 DP1
- 6 AUDIO OUT


***WARNING:** Always use the appropriate power cord.

Accessories


PACKAGE INCLUDES




34inch Monitor




Stand




DP Cable

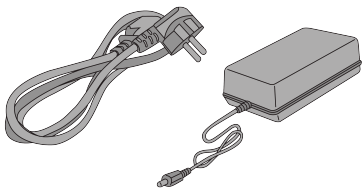


Power Adapter
and Power Cable



User Manual




VESA Adapter



VESA Screws (4pcs)

Monitor Control Buttons

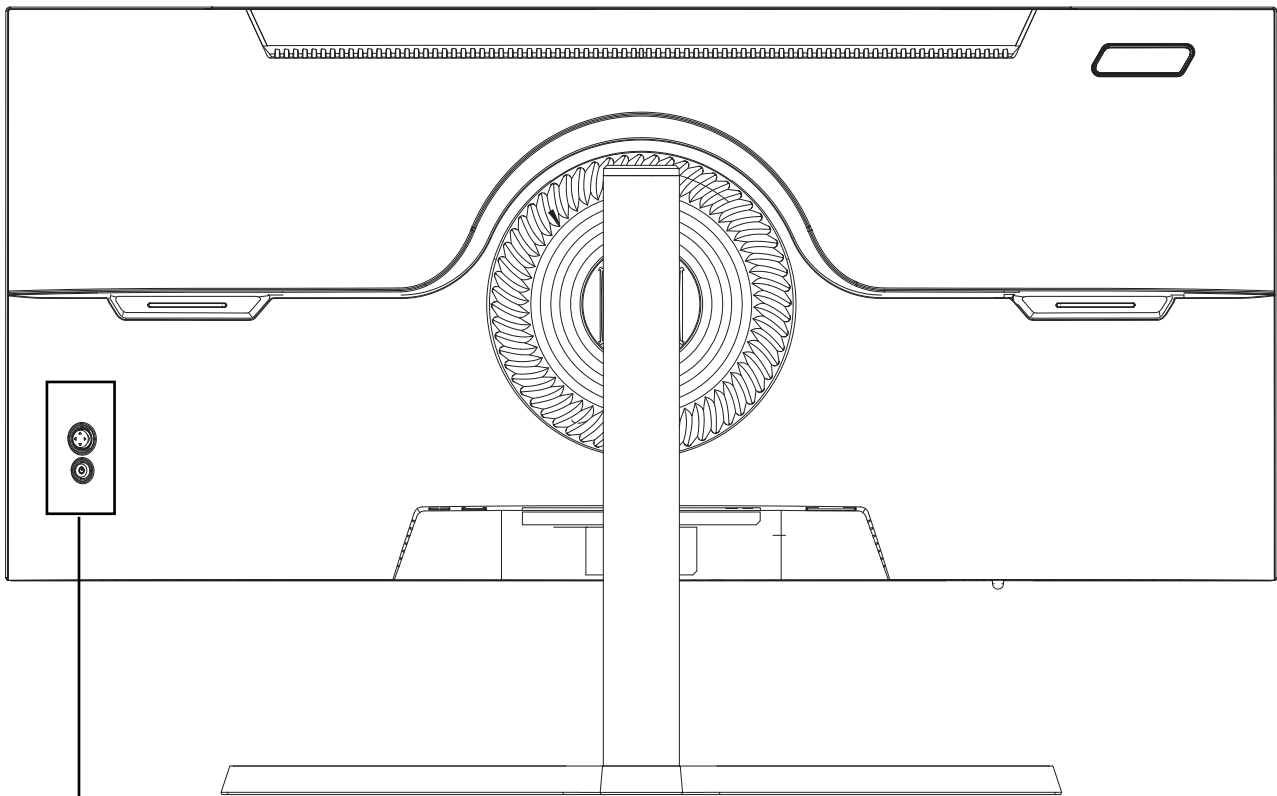


- 1.UP: Press up Allow to select menu.
- 2.DOWN: Press down to appear the signal source, and press down in the menu option to return to the previous menu.
- 3.LEFT: Press left to access the image options shortcut function.
- 4.RIGHT: Press right to enter the cross core exchange function.

INITIAL SETUP


Connect the monitor to a power outlet.

1. Press the POWER button on the monitor or to turn it on (The indicator will be blue).
2. Connect the relevant cable to the corresponding input on the monitor. The source will be automatically detected.
3. To change between inputs, press the "Source" button to enter the source menu. Use the "◀" and "▶" buttons to choose the input source between Auto Select, DP1, DP2, and HDMI1, HDMI2.

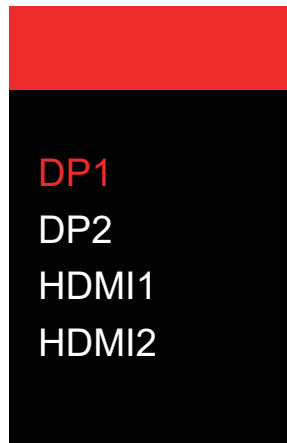


OSD MENU

A. Input Source

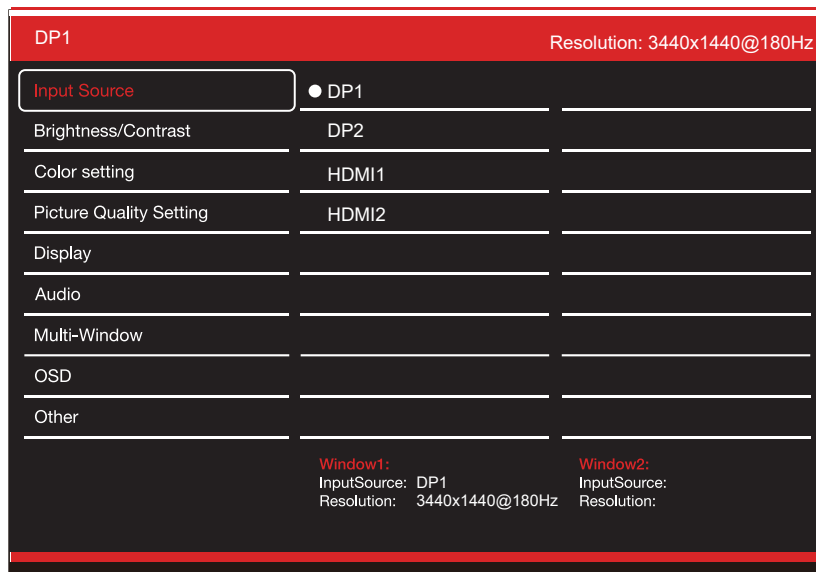

Switch the signal input to DP1,DP2,HDMI1 or HDMI2 have the monitor Auto Select the source.

B . Brightness/Contrast

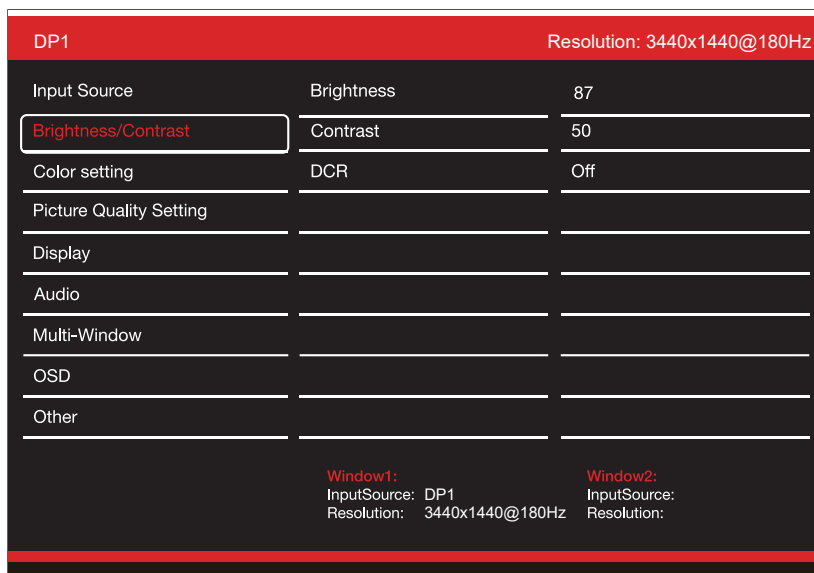

Brightness: Change the display brightness value from 0 to 100.

Contrast: Adjust the display contrast value from 0 to 100.

DCR: Turn the Dynamic Contrast Ratio feature On or Off.

C . Color Setting

DP1		Resolution: 3440x1440@180Hz
Input Source	Gamma	2.2
Brightness/Contrast	Picture Mode	Standard
Color setting	Color Temperature	Warm
Picture Quality Setting	Hue	50
Display	Saturation	50
Audio	Low Blue Light	0
Multi-Window		
OSD		
Other		
Window1: InputSource: DP1 Resolution: 3440x1440@180Hz		Window2: InputSource: Resolution:

Gamma: Change the display Gamma value to:2.0,2.2,2.4.

Pirture Mode: Change the pre-set mode to: Standard, Text, Game,Movie, RTS or ECO.

Color Temperature: Change the color temperature to:Normal,Warm,Cool,User.

Hue: Change the display Hue value from o to 100.

Saturation: Change the display Saturation value from 0 to 100.

Low Blue Light: Change the display Saturation value from 0 to 100.

D . Picture Quality Setting

DP1		Resolution: 3440x1440@180Hz
Input Source	Sharpness	50
Brightness/Contrast	Response Time	Off
Color setting	Noise Reduction	Off
Picture Quality Setting	Super Resolution	Off
Display	Dynamic Luminous Control	Off
Audio		
Multi-Window		
OSD		
Other		
Window1: InputSource: DP1 Resolution: 3440x1440@180Hz		Window2: InputSource: Resolution:

Sharpness: Change the display Sharpness value from 0 to 100.

Response Time: Select the Response Time Value from,Low,Middle,High or turn it Off.

Noise Reduction: Select the Noise Reduction Value from,Low,Middle,High or turn it Off.

Super Resolution: Select the Super Reduction Value from,Low,Middle,High or turn it Off.

Dynamic Luminance Control: Turn the Dynamic Luminance Control feature On or Off.

E . Display

DP1		Resolution: 3440x1440@180Hz
Input Source	Aspect Ratio	21:9
Brightness/Contrast		
Color setting		
Picture Quality Setting		
Display		
Audio		
Multi-Window		
OSD		
Other		
Window1: InputSource: DP1 Resolution: 3440x1440@180Hz		Window2: InputSource: Resolution:

Aspect Ratio: Change the image aspect ratio to 21:9,Auto,4:3 or 1:1.

F . Audio

DP1		Resolution: 3440x1440@180Hz
Input Source	Mute	Off
Brightness/Contrast	Volume	50
Color setting	Audio Source	DP1
Picture Quality Setting		
Display		
Audio		
Multi-Window		
OSD		
Other		
Window1: InputSource: DP1 Resolution: 3440x1440@180Hz		Window2: InputSource: Resolution:

Mute:Turn On or Off to mute the audio source.

Volume: Change the audio source volume from 0 to 100.

Audio Source: Audio source interface switching HDMI1,HDMI2, DP1, DP2.

G . Multi-window

DP1		Resolution: 3440x1440@180Hz
Input Source	Multi-Window	Off
Brightness/Contrast	SubWin 2 Input	DP2
Color setting	PIP Size	Mediun
Picture Quality Setting	PIP Position	TopRight
Display	Swap	
Audio		
Multi-Window		
OSD		
Other		
Window1: InputSource: DP1 Resolution: 3440x1440@180Hz		Window2: InputSource: Resolution:

Multi-window: Adjust the muitl-window to off / PIP / PBP.

H . OSD

DP1		Resolution: 3440x1440@180Hz
Input Source	Language	English
Brightness/Contrast	OSD H-Position	50
Color setting	OSD V-Position	50
Picture Quality Setting	OSD Transparency	20
Display	OSD Time Out	20
Audio	OSD Rotation	Normal
Multi-Window		
OSD		
Other		
Window1: InputSource: DP1 Resolution: 3440x1440@180Hz		Window2: InputSource: Resolution:

Language: Change the OSD Menu display language.

OSD H Position: Change the horizontal position of the OSD Menu.

OSD V Position: Change the vertical position of the OSD Menu.

OSD Transparency: Change the transparency value of the OSD Menu from 0 to 100.

OSD Timer Out: Change how long the OSD Menu is on before it automatically exits.

OSD Rotation: Rotate the OSD Menu.

I . Other

DP1		Resolution: 3440x1440@180Hz
Input Source	FreeSync (Adaptive Sync)	Off
Brightness/Contrast	HDR	Off
Color setting	MPRT	Off
Picture Quality Setting	Flicker Free	Off
Display	LightEffect	Off
Audio	Reset	
Multi-Window		
OSD		
Other		
Window1: InputSource: DP1 Resolution: 3440x1440@180Hz		Window2: InputSource: Resolution:

FreeSync Mode: Turn FreeSync On or Off.

HDR: Turn HDR On (requires HDMI 2.0 input).

MPRT: On or Off.

Flicker Free: On or Off.

LightEffect: On or Off.

Reset: Press this function to restore the original settings.

Technical Specificaions

Model No.:	SG34-UWQ180C
Screen Size	34"
Panel Type	VA
Backlight type	LED
Aspect Ratio	21:9
Brightness (Max)	350cd/m ²
Contrast Ratio (Typical.)	3000:1
Resolution	3440x1440 @ 180Hz
Response Time	MPRT 1ms
Viewing Angle (Horizontal/Vertical)	178°/178° (CR>10)
Color Support	16.7M (8bit)
Video Signal	Analog RGB/Digital
Sync. Signal	Separate H/V, Composite, SOG
Connector	HDMIx2+DPx2
Power Consumption	Typical 55W
Stand By Power (DPMS)	<0.5W
Type	DC12V, 5A
Freesync and Adaptive sync	Supported
HDR	Supported
Plug & Play	Supported
Cabinet Color	Matt Black
Flick free	Supported
Low BLue Light Mode	Supported
RGB light	Supported
VESA mount	100x100mm
Audio	2x3W

HDMI™ The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



SHARKGAMING